



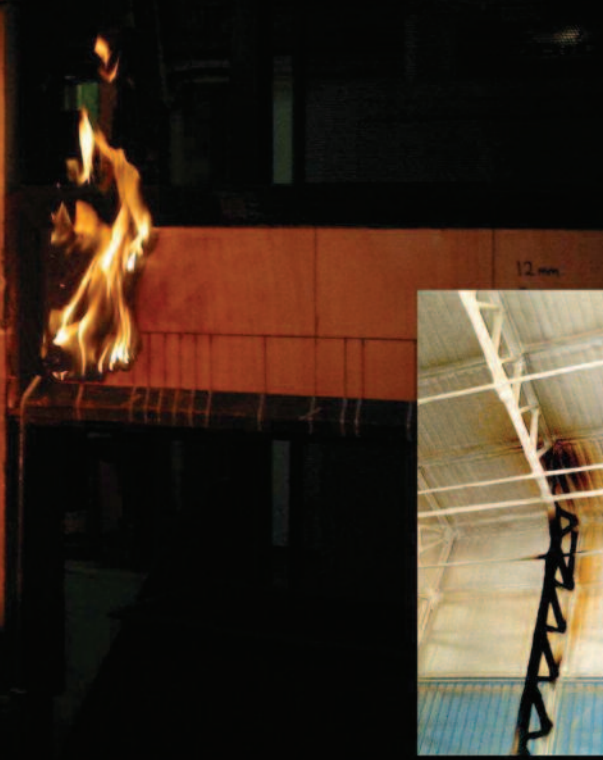

WALLTITE®

The airtight insulation solution

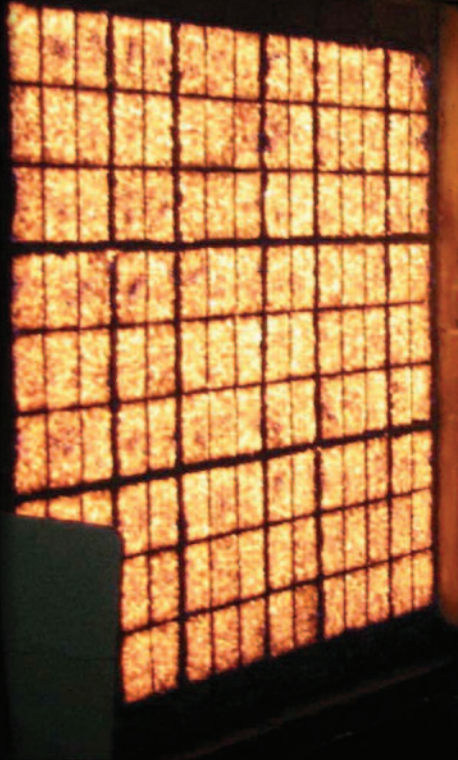

The Question of Flammability

- ✓ Class 1 to BS 476: Part 7 – no more than 165mm flame spread
- ✓ Heat source ~ 500°C
- ✓ Naked flame for 60 seconds
- ✓ Test duration – 10 minutes
- ✓ Only as combustible as the timber in a roof
- ✓ Certainly less flammable than bitumen based sarking felts
- ✓ Tyvec Breathers – Euroclass E – same as PU

 **BASF**

The Chemical Company